


Installation Instructions

Lift Lever Kit

Mfg. No. 1694947

For Broadmoor / 200 / 1600 / 2600 Series

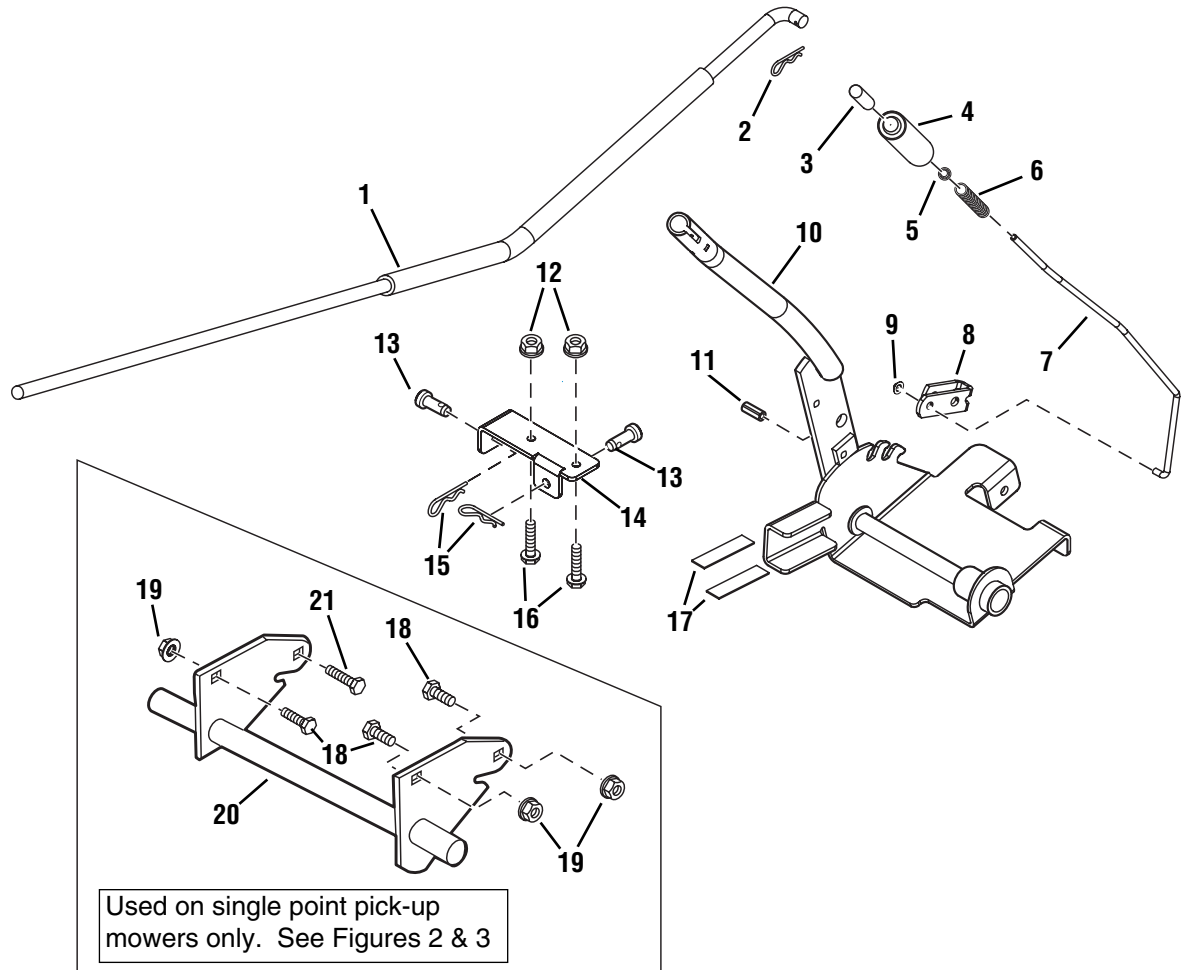

Kit Contents:

Ref	Part No.	Qty.	Description
1	1725959A	1	ROD & TUBE ASSEMBLY
2	1960033	1	CLIP, Hair Pin
3	1723124	1	BUTTON, Red
4	1713995	1	GRIP, Soft, Black
5	1960674	1	PUSH NUT, 1/4
6	1723321	1	SPRING, Compression
7	1725958	1	ROD, Latch
8	1721999A	1	LATCH, Lift Lever
9	1960126	1	PUSH NUT, 1/4
10	1727441A	1	LEVER ASSEMBLY
11	1927609	1	PIN, 3/8 x 1
12	1931277	6	NUT, Hex, Flange Whiz Lock, 5/16-18
13	1708298	2	PIN, Round Head, Drilled, 3/8 x 1
14	1725705A	1	BRACKET, Mounting
15	1960074	2	CLIP, Hair Pin
16	1960585	2	CAPSCREW, Hex Head, 5/16-18 x 1-3/4
17	1725957	2	PAD, Rubber
18	2826149	3	CAPSCREW, Hex Head, 5/16-18 x 1
19	1960636	3	NUT, Hex, KEPS, 5/16-18
20	1731381A	1	SHAFT ASSEMBLY
21	1921221	1	CAPSCREW, Hex Head, 5/16-18 x 1-1/2

Figure 1. Contents

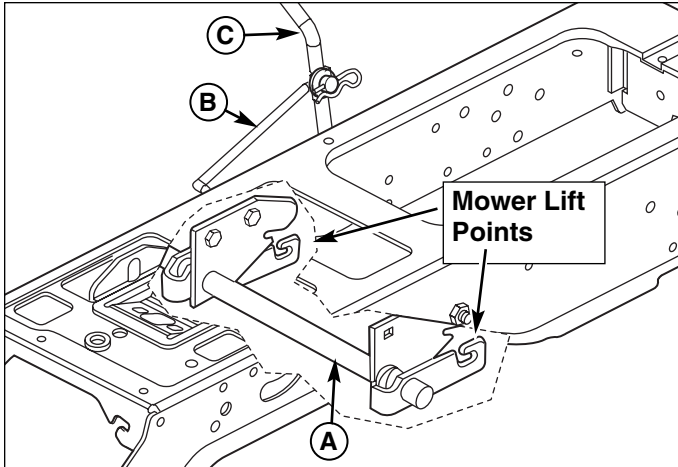


Figure 2. Typical Dual Point Pick-Up
A. Lift Shaft Assembly C. Lift Lever
B. Lift Rod

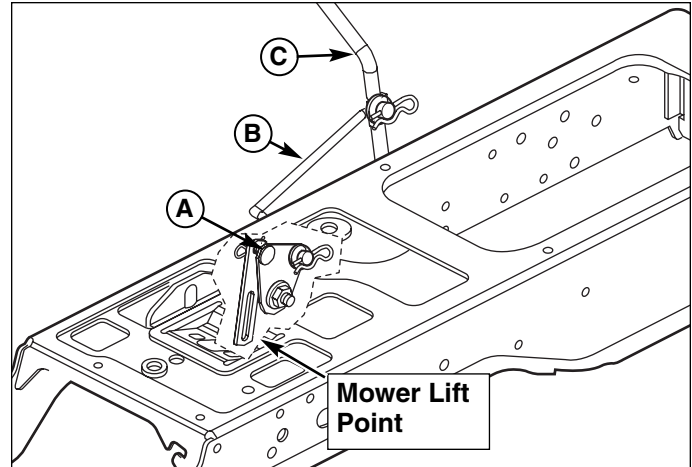


Figure 3. Typical Single Point Pick-Up
A. Bell Crank Assembly C. Lift Lever
B. Lift Rod

Note: Dual point pick-up mowers have the lift attached at two points on the mower deck. See Figure 2. Lift shaft assembly (A) is already installed on these tractors.
Do not replace with lift shaft assembly provided in kit.

Single point pick-up mowers have the lift attached at one point on the mower deck. See Figure 3.

This kit adds a lift lever for front mounted attachments.

INSTALLATION

WARNING

Before beginning any service work turn off the PTO, set the parking brake, turn off the ignition, and disconnect the spark plug wire(s).

ALL MODELS

1. Remove mower deck as described in the Operator's Manual.
2. Remove nuts (A, Figure 4) and capscrews (B) which hold the right rear seat deck (C) to the frame (D). Discard capscrews.
3. Install bracket (E, Figure 5) using new 5/16-18 x 1-3/4 capscrews (B) and 5/16-18 nuts (A).

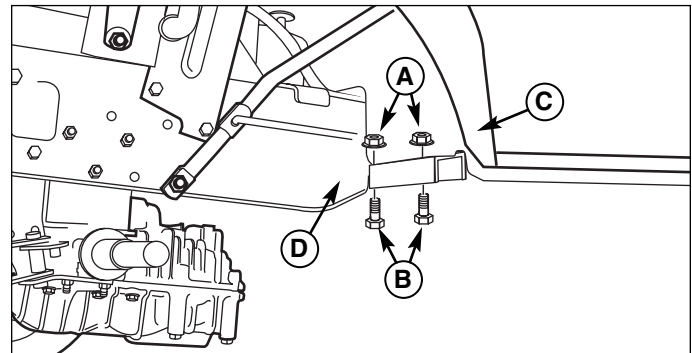


Figure 4. Capscrew Removal
A. Nuts C. Right Rear Seat Deck
B. Capscrews D. Frame

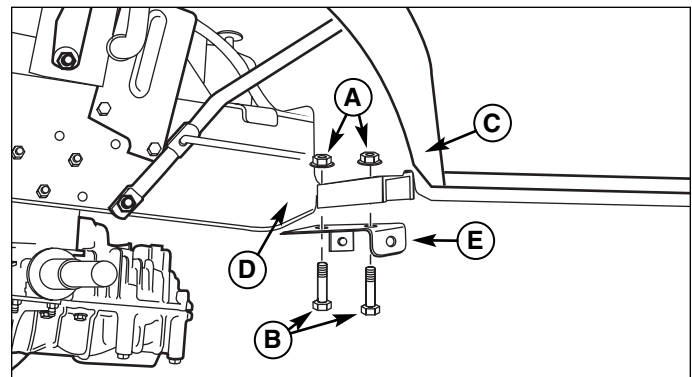


Figure 5. Bracket installation
A. Nuts D. Frame
B. Capscrews E. Bracket
C. Right Rear Seat Deck

Install Lift Shaft Assembly

SINGLE POINT PICK-UP MODELS ONLY

1. Remove and retain spacer (E, Figure 6), bell crank assembly (F), washer (G), and nut (H). You may find installation easier to remove rod (C) and one cotter pin (A) and washer (B).
2. Remove and discard capscrew (D).

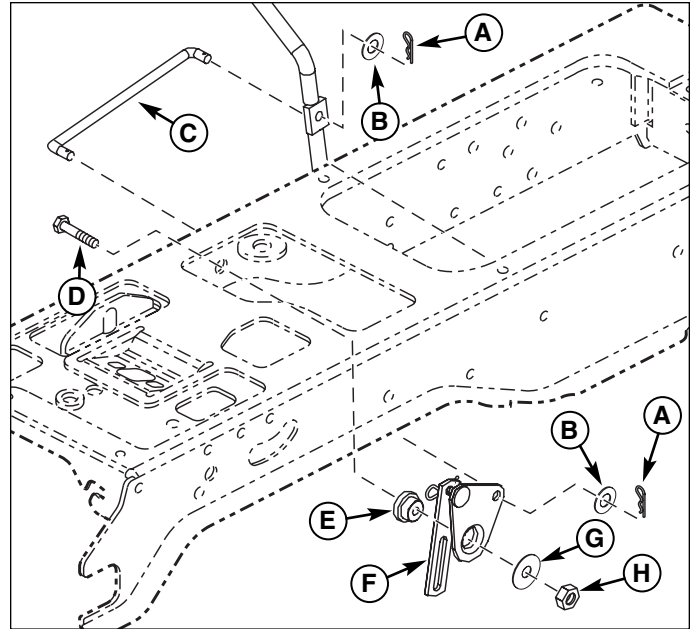


Figure 6. Rod & Bell Crank Removal

- | | |
|-------------|------------------------|
| A. Hair Pin | E. Spacer |
| B. Washer | F. Bell Crank Assembly |
| C. Rod | G. Washer |
| D. Capscrew | H. Nut |

3. Mount the lift shaft assembly (A, Figure 7) to the frame using three 5/16-18 x 1 capscrews (B) and 5/16-18 flange nuts (C) as shown.
4. Install 5/16-18 x 1-1/2 capscrew (D), spacer (F), bell crank (G), washer & 5/16-18 nut (I).
5. Install rod (H), and hair pin & washer (E) if removed.

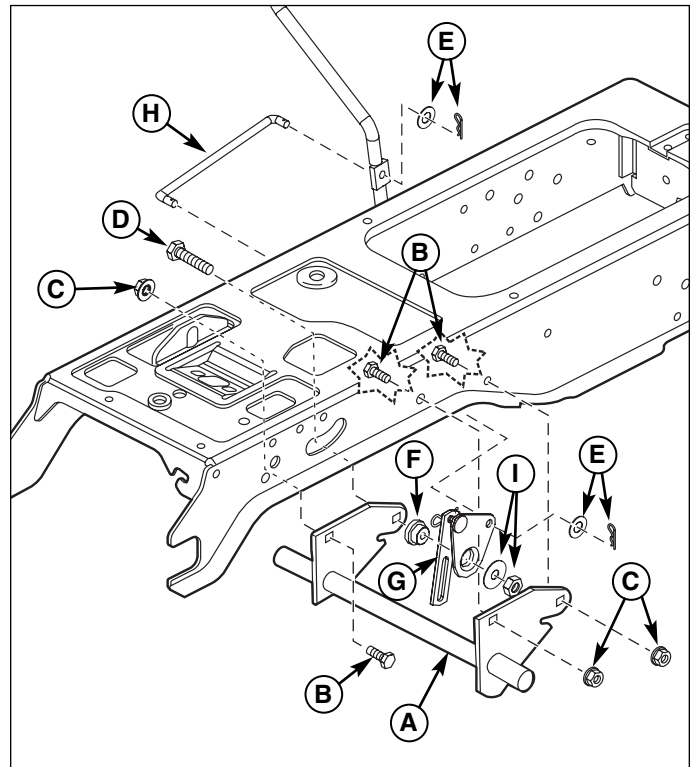


Figure 7. Install Lift Shaft Assembly & Rod.

- | | |
|----------------------------------|--------------------------|
| A. Lift Shaft Assembly | E. Hair Pin & Washer |
| B. Capscrews, Hex 5/16-18 x 1 | F. Spacer |
| C. Flange Nuts, 5/16-18 | G. Bell Crank |
| D. Capscrew, Hex 5/16-18 x 1-1/2 | H. Rod |
| | I. Washer & Nut, 5/16-18 |

Install Front Attachment Lift Lever & Rod

ALL MODELS

1. Slide the lift lever assembly (A, Figure 8) on to the end of the shaft assembly and on to the edge of the tractor.
2. Secure to mounting bracket (D) using clevis pins (B) and hair pin (C).

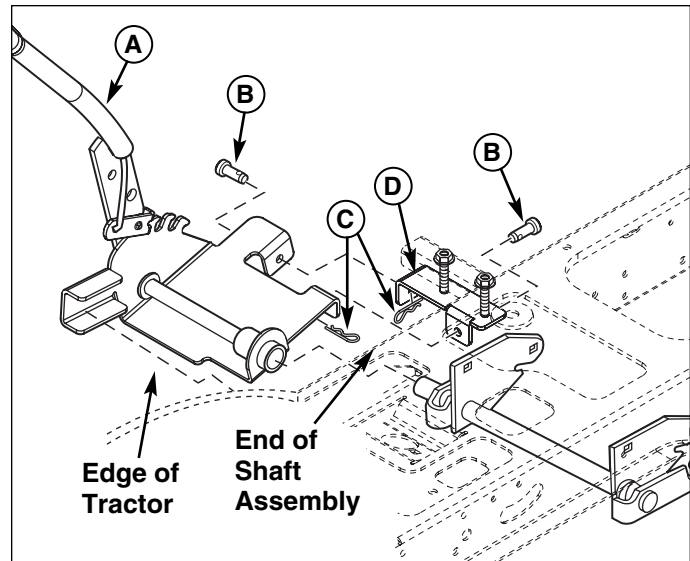


Figure 8. Install Lift lever Assembly.

A. Lift Lever Assembly C. Hair Pin
B. Clevis Pin D. Mounting Bracket

3. Slide lift rod (A, Figure 9) into the bottom hole in the lift lever assembly (B). Secure with hair pin. Install front attachment & hitch as outlined in Operator's Manual or Installation Instructions.
4. Removal of Front Attachment Lift Lever & Rod is reverse of installation.

Note: Substitute lift rod A, Figure 9 for the lift rod provided in the attachment hitch.

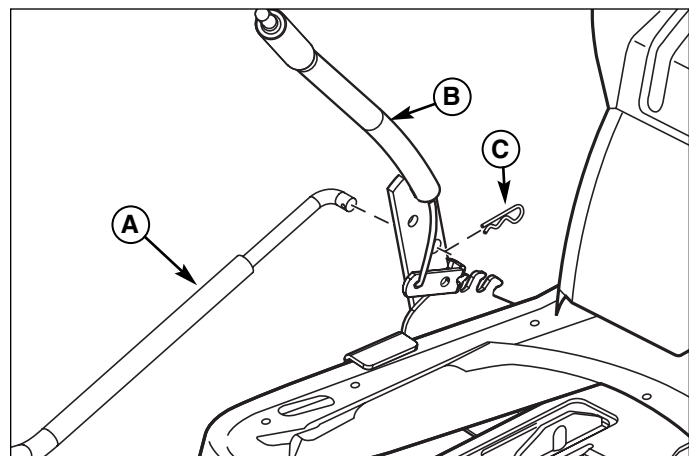


Figure 9. Install Lift Rod

A. Lift Rod C. Hair Pin
B. Lift Lever Assembly



MANUFACTURING, INC.

500 N Spring Street / PO Box 997
 Port Washington, WI 53074-0997 USA

Form No. 1731401
 Revision 01 Rev. Date 11/2005
 © 2005 Simplicity Manufacturing, Inc. All Rights Reserved
 TP 200-4229-01-AT-SMAN